




Remote Monitoring and Alarm Notification System

- **Monitor** up to 8 conditions, plus power failure and sound level.
- **Notify** up to 8 people with custom voice phone calls or text messages
- **Review** alarm history and who acknowledged the alarm event
- **Control** a device automatically, manually, even remotely.

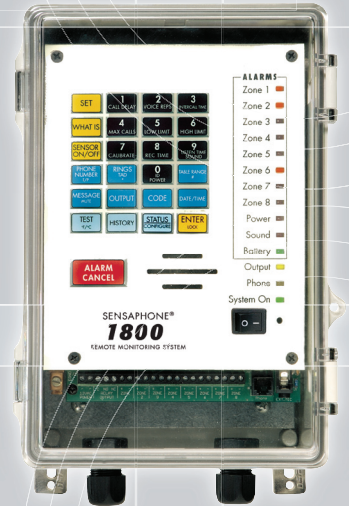

- *Sends a text message and alpha page alarms.*
- *Includes mysensaphone.com web status feature.*

1800 Features

The Sensaphone Model 1800 provides reliable, easy to use monitoring for a wide array of applications. This cost effective model includes eight universal inputs to provide the flexibility you want while monitoring the most critical of conditions. Sensors can monitor temperature problems in agricultural environments, laboratories, medical applications and ultra-low temperature freezer conditions – monitoring all the way down to -85°C . The 4-20mA input choice means that the 1800 can be used with a wide variety of transducers to monitor tank levels, pressure, flow rates, and other conditions critical to your application.


If a problem occurs, the 1800 can be programmed to contact up to eight people using the custom alarm information you record yourself, so you always know the nature of the alarm situation. The 1800 also uploads status and history information to a web server, allowing you to view accumulated data log history.

Applications

Tank Levels



Laboratory Applications

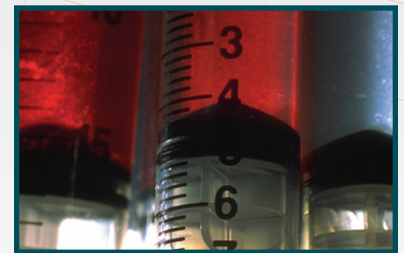

Greenhouses



Feature Details

Input Zones:

- Eight universal inputs that support:
 - Normally Open or Normally Closed contacts
 - 4–20mA transducers
 - Temperature sensors: 2.8 & 10K thermistors
- Automatic input type configuration
- Scalable range for analog zones.
- Programmable recognition times.
- Internal calibration.

Local Access:

- Keypad and speaker for local programming.
- Easy voice-prompted programming.
- Password-protected to restrict remote programming access.
- Recent alarm history playback.

Remote Access:

- Call in with any Touch-Tone phone to check the status of all monitored conditions.
- Make programming changes remotely from any Touch-Tone phone.

Alarm Notification:

- Up to eight destinations can be contacted for alarms.
- Customized messages for easy identification.
- Voice phone calls or text messages
- Built-in alarm test function to simulate and test the notification process.
- Individual user codes to track who responded to each alarm.
- Web page data display

Output Relay:

- One universal output relay. Manual or automatic alarm response switching.

Microphone:


- Internal microphone for custom voice message recording.
- Optional external microphone for monitoring high sound alarms.
- External microphone can also be used for remote Listen-in feature.

Power Supply:

- Comes with plug-in power supply.
- Battery backup included.
- Automatically monitors for power failure alarms.

Other:

- Includes telephone Line Seizure.
- NEMA-4 enclosure.
- Superior internal lightning protection.
- Two-year warranty.

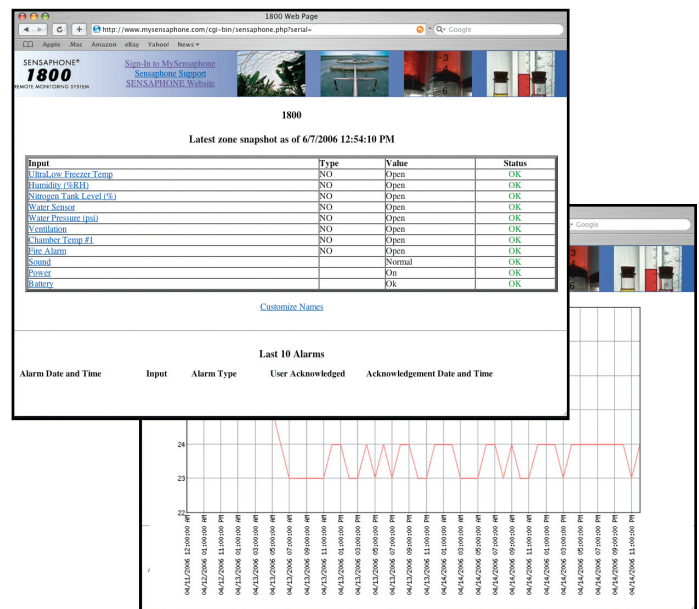

Web Features:

- 30 Minute snapshots
- Complete alarm history
- Graph monitored conditions

Distributed by:

SENSAPHONE®

901 Tryens Road
Aston, PA 19014

Phone: 610-558-2700
Fax: 610-558-0222

www.sensaphone.com

Specifications subject to change without notice.